


Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.265+ / H.264
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-322FL / KI-322FL1

Camera

Image Sensor	KI-322FL=2MP Cmos Sensor (1/2.7") KI-322FL1=2MP Starlight Cmos Sensor (1/2.8")
CPU	HI3516D
Lens	3.6mm Fixed Lens (2.8mm Optional)
Resolution	1920*1080 (2MP)
Available IR Range	15~20M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.002 Lux
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	WDR, DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P (Triple Stream)
Transmission Stream	(Code Rate: 128kb-8mb)

Network

Protocols	HTTPS, HTTP, TCP/IP Ver4, ICMP, RTSP, RTP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	iOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	Audio In, Audio Out
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	12V-Max 5.0W(0.5A)
POE Supply	IEEE802.3af-Max 5.5W(0.115mA)
Web Language	English, Persian
Dimension	62*162.2mm
Weight	400g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min- MIL-HDBK-217F (25°)

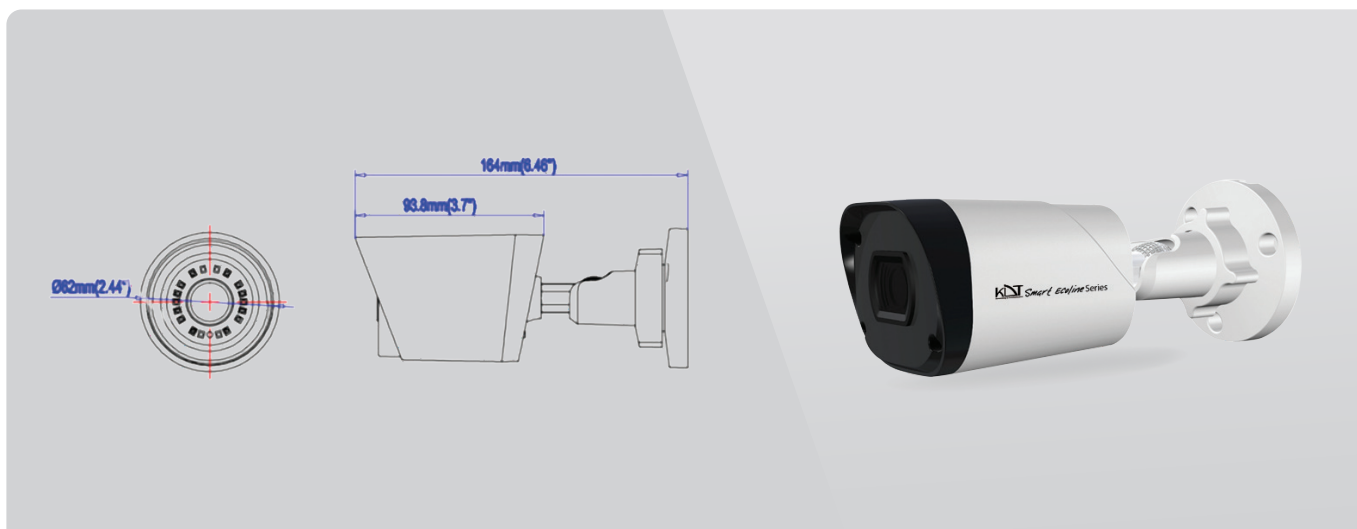

Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.265+ / H.264
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-322FH

Camera

Image Sensor	2MP Cmos Sensor (1/2.9")
CPU	Hi3516EV100
Lens	3.6mm Fixed Lens
Resolution	1920*1080 (2MP)
Available IR Range	25M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.002 Lux
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P (Triple Stream)
Transmission Stream	Triple Stream:(Code Rate: 128kb-10mb)

Network

Protocols	HTTPs, HTTP, TCP/IP Ver4, ICMP, RTSP, RTCP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	iOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	No
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	DC12V ± 10%
POE Supply	IEEE802-3af-Max 5-5W(0-115mA)
Web Language	English, Persian
Dimension	67.5*57.5*152mm
Weight	365g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)

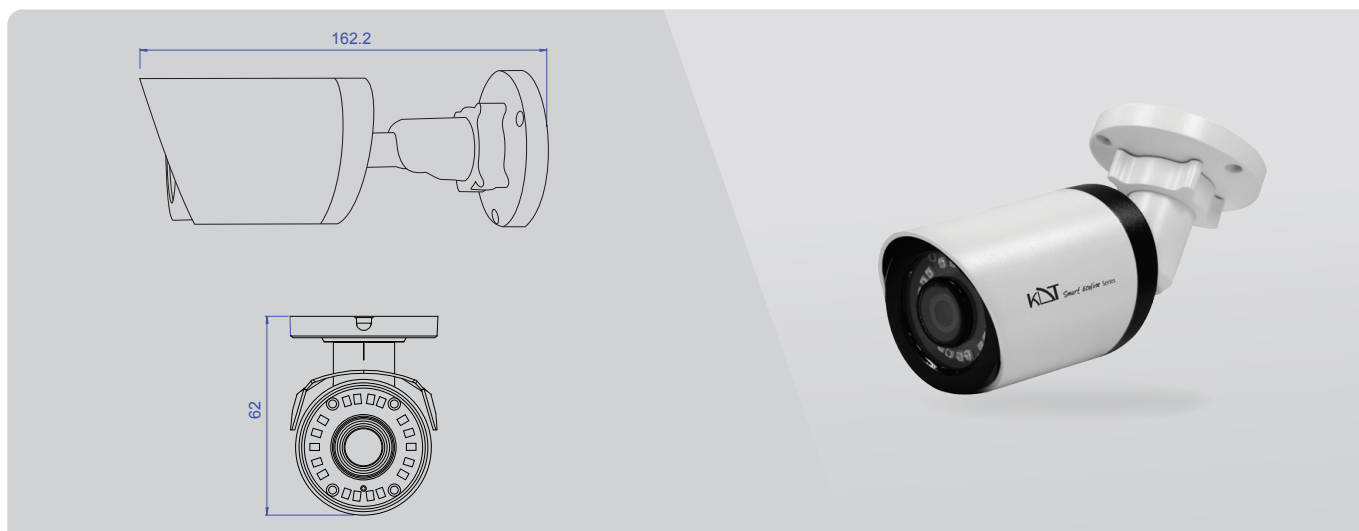

Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.265+ / H.264+
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-325FL / KI-325FL1

Camera

Image Sensor	KI-325FL=5MP Cmos Sensor (1/2.7") KI-325FL1=5MP Starlight Cmos Sensor (1/2.8")
CPU	HI3516D
Lens	3.6mm Fixed Lens (2.8mm Optional)
Resolution	2592*1944 (5MP)
Available IR Range	15~20M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.002 Lux
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	WDR, DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P, 30fps@4MP, 20fps@5MP (Triple Stream)
Transmission Stream	(Code Rate: 128kb-10mb)

Network

Protocols	HTTPs, HTTP, TCP/IP Ver4, ICMP, RTSP, RTP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	iOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	Audio In, Audio Out
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	12V-Max 5.0W(0.5A)
POE Supply	IEEE802.3af-Max 5.5W(0.115mA)
Web Language	English, Persian
Dimension	62*162.2mm
Weight	400g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)

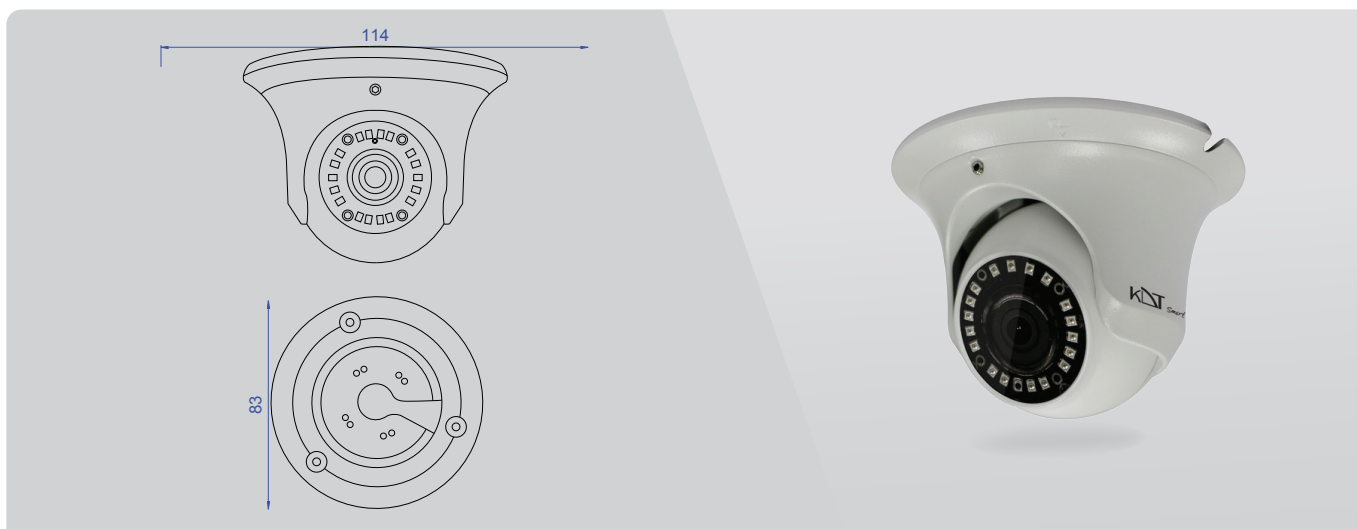

Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.265+ / H.264
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-372FL / KI-372FL1

Camera

Image Sensor	KI-372FL=2MP Cmos Sensor (1/2.7") KI-372FL1=2MP Starlight Cmos Sensor (1/2.8")
CPU	HI3516D
Lens	3.6mm Fixed Lens (2.8mm Optional)
Resolution	1920*1080 (2MP)
Available IR Range	15~20M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.002 Lux
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	WDR, DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P (Triple Stream)
Transmission Stream	Triple Stream:(Code Rate: 128kb-8mb)

Network

Protocols	HTTPS, HTTP, TCP/IP Ver4, ICMP, RTSP, RTP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	IOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	Audio In, Audio Out
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	DC12V ± 10%
POE Supply	IEEE802.3af-Max 5.5W(0.115mA)
Web Language	English, Persian
Dimension	114*83mm
Weight	350g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)

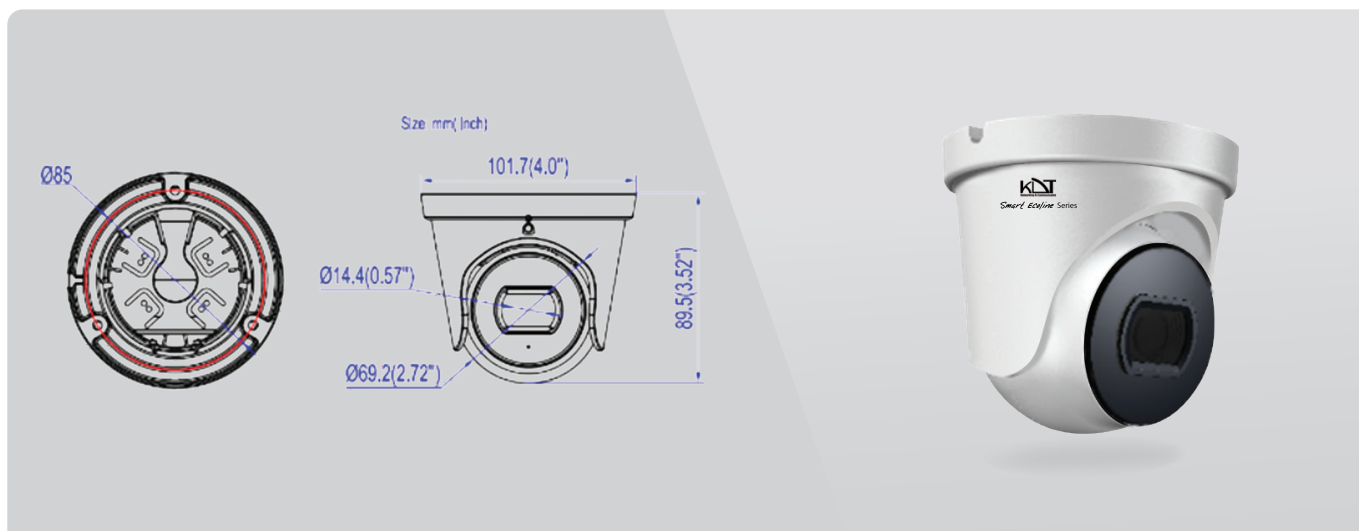

Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.264+ / H.265+
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-372FH

Camera

Image Sensor	2MP Cmos Sensor (1/2.9")
CPU	Hi3516EV100
Lens	3.6mm Fixed Lens
Resolution	1920*1080 (2MP)
Available IR Range	25M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.01lux(Color), 0lux(IR on)
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
	30fps@960P, 30fps@1080P (Triple Stream)
Transmission Stream	Triple Stream:(Code Rate: 128kb-8mb)

Network

Protocols	TCP/IP, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, IPV6
Compatibility	Onvif Ver2.6, Profile S, CGI
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	IOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection,
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	No
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	DC12V ± 10%
POE Supply	IEEE802.3af-Max 5.5W(0.115mA)
Web Language	English, Persian
Dimension	101.7*89.5mm
Weight	330g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)

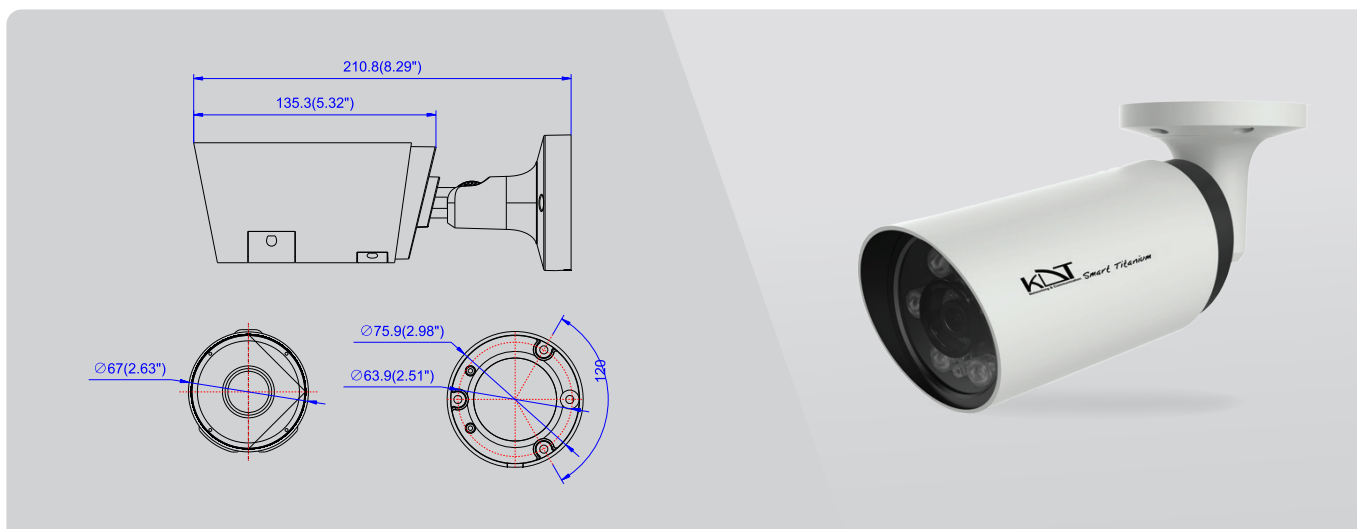

Key Feature / Smart Function



شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.264+ / H.265+
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-335VL / KI-335VL1

Camera

Image Sensor	KI-335VL=5MP Cmos Sensor (1/2.8") KI-335VL1=5MP Starlight Cmos Sensor (1/2.8")
CPU	HI3516D
Lens	2.8~12mm Varifocal Lens
Resolution	2592*1944 (5MP)
Available IR Range	20~25M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.002 Lux
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	WDR, DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P, 30fps@4MP, 20fps@5MP (Triple Stream)
Transmission Stream	Triple Stream:(Code Rate: 128kb-10mb)

Network

Protocols	HTTPs, HTTP, TCP/IP Ver4, ICMP, RTSP, RTCP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.6, Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	iOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface


Network	RJ45(10/100)
Audio	Audio In, Audio Out
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General


IP Rating	IP66
Power Supply	12V-Max 8.0W(0.7A)
POE Supply	IEEE802.3af-Max 8.5W(0.178mA)
Web Language	English, Persian
Dimension	75.9*210.8mm
Weight	720g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)

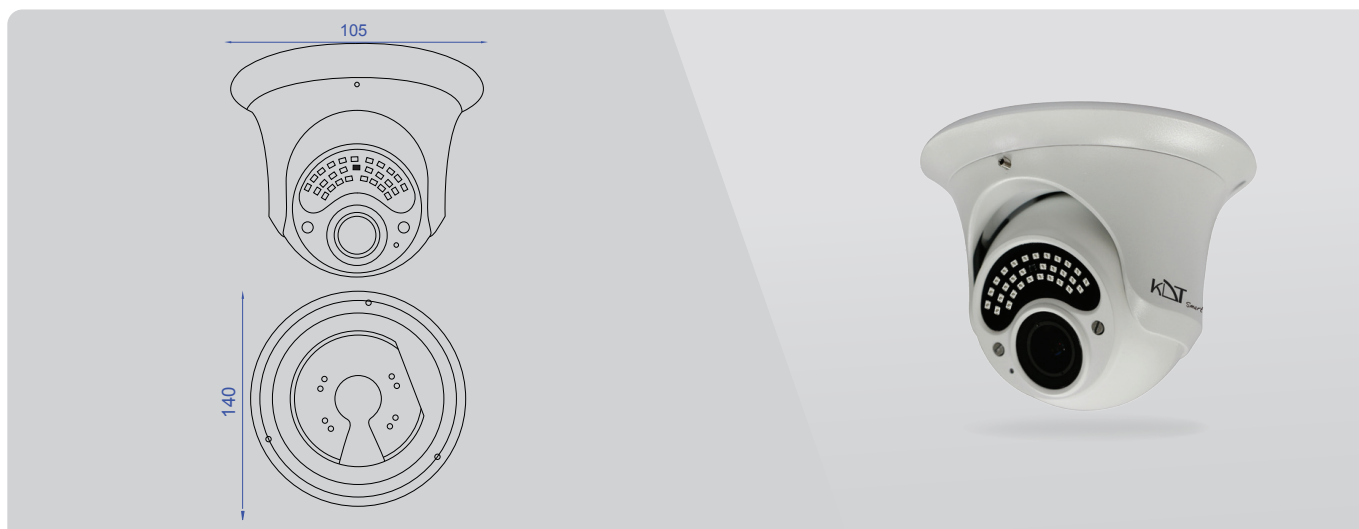

Key Feature / Smart Function

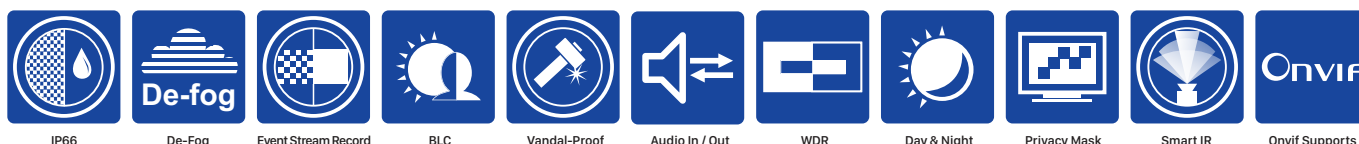

شرایط گارانتی:

- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی شامل:
- آبخوردگی، شکستگی، ضربه دیدگی، خسارت ناشی از صاعقه، زنگ زدگی، نوسانات برق و سایر اتفاقات و صدمات

سایر برتری ها:

- بدنه ضد آب و گرد و غبار با درجه IP66
- سرور انتقال تصویر در پارس آنلاین
- پشتیبانی از H.265+ / H.264+
- بدنه ضد ضربه با استاندارد IK10
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog

قابلیت های هوشمند:

- عبور از خط
- فنس مجازی
- تشخیص حرکت
- گم شدن اشیاء
- اضافه شدن اشیاء
- تشخیص حرکت سریع افراد

Specification / KI-385VL / KI-385VL1

Camera

Image Sensor	KI-385VL=5MP Cmos Sensor (1/2.8") KI-385VL1=5MP Starlight Cmos Sensor (1/2.8")
CPU	HI3516D
Lens	2.8~12mm Varifocal Lens
Resolution	2592*1944 (5MP)
Available IR Range	20~25M Smart IR SMD Technology
Filter	Removable IR Cut Filter
Min Color Illumination	0.01lux(Color), 0lux(IR on)
Min B/W Illumination	0 Lux
StarLight View	Yes-Color

Picture Adjust

Picture Function	WDR, DWDR, BLC, HLC, Dfog
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Setting	Saturation, Brightness, Contrast, Sharpness, Hue

Video / Audio

Video Compression	H.264+, H.265+ Smart Event Codec
Audio Compression	G.711A, G.711U
Frame Rate	30fps@960P, 30fps@1080P, 30fps@4MP, 20fps@5MP (Triple Stream)
Transmission Stream	Triple Stream:(Code Rate: 128kb-10mb)

Network

Protocols	HTTPs, HTTP, TCP/IP Ver4, ICMP, RTSP, RTCP, UDP, NTP, DHCP, DNS, DDNS, FTP, SNMP-V1-V2-V3, UPNP, P2P, NAT, Multi Cast
Compatibility	Onvif Ver2.4, Onvif Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast, Multicast
Web Viewer	IE (Version 11)
Software	KDT CMS 256CH
Smartphone	iOS, Android

Function

Recording	FTP, NVR, CMS, NAS, Cloud
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection, Blind Detection, Smart Detection
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Intelligent Function	6 Smart Function Line Crossing, Area Intrusion, Fast Moving, Unattended Object, Object Missing, Motion Detection

Interface

Network	RJ45(10/100)
Audio	Audio In, Audio Out
Alarm	No
CVBS	No
Power	PoE LAN, DC In
Control	No
Memory Slot	No

General

IP Rating	IP66
Power Supply	12V-Max 7.0W(0.7A)
POE Supply	IEEE802.3af-Max 7.5W(0.215mA)
Web Language	English, Persian
Dimension	140*105mm
Weight	690g
Storage Temp	-30°C ~ +60°C/10% ~ 90% RH
Operation Temp	-15°C ~ +45°C/10% ~ 90% RH

Warranty

Product Warranty	2 Year Silver Guaranty
MTBF	100K hrs min. MIL-HDBK-217F (25°)