


IP Camera

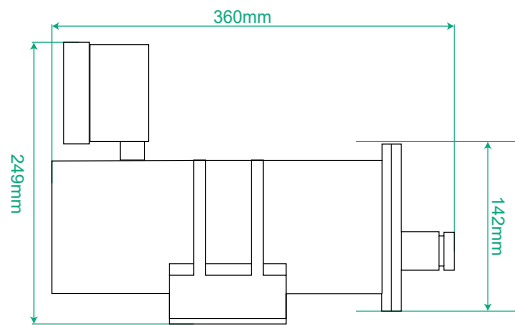

1402-S1

Explosion Proof

2 years Silver Guarantee

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

سایر برتری‌ها:

- بدنه ضد آب و گرد و غبار با درجه IP68
- بدنه ضد ضربه با استاندارد IK10
- ضد انفجار
- جنس بدنه از استیل
- جنس پایه از استیل ۳۰۴ یا ۳۱۶
- جنس شیشه از کوارتز مقاوم در برابر دما
- پشتیبانی از H.264 / H.265/MJPEG
- پشتیبانی از ONVIF
- قابلیت WDR, BLC, HLC, Defog

Camera	
Image Sensor	2MP Starlight Cmos Sensor (1/2.7")
Lens	2.8~12 mm Motorized Lens
Resolution	1920x 1080 (2MP)
Available IR Range	100 m IR SMD Technology
D/N Filter	IR Cut Filter Switch (ICR)
Min Illumination	Color: 0.01 Lux(AGC on) - B/W: 0.0 Lux(F1.2, AGC ON)
Min Illumination	H-FOV: 112°~28°, V-FOV: 60°~15°, D-FOV: 146°~33°
Night Vision	Color /IR
Picture Adjust	
Picture Function	DWDR, 3D DNR, BLC, HLC, Defog, ROI
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.265, H.264, MJPEG
Audio Compression	G.711A, G.722.1, G.7226, MP2L2
Frame Rate(60Hz)	30fps@(1920x1080), 30fps@(1280x960), 30fps@(1280x720)
Transmission Stream	Triple Stream (Code Rate: 32kbps-8mbps)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
Compatibility	Onvif(profile S/G/T/API)
Web Viewer	Multi Browser
Function	
Recording	FTP, NVR, CMS
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection
Event Action	N/A
Intelligent Function	N/A

Interface	
Network	1 x RJ45(10/100mbps)
Audio	Audio in, Audio out (Optional)
Alarm	2-Alarm in, 1-Alarm out (Optional)
CVBS	Yes - Optional (Optional)
Power	PoE LAN / Power IN (Optional)
Control	1 x RS485 (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (128 Gb Max)
Camera Housing Box	
Type	Explosion Proof
IP Rating	IP68, IK10, EX Protection, 3KV Surge Protection
Housing	Stainless Steel 304 (optional 316L)
Cooling Water	N/A
Cooling Air	N/A
Sun-Shield	YES / (Optional)
Bracket	YES / Stainless Steel 304 / 2.5 Kg / Wall or poll
EX Flexible Tube	YES / Explosion Proof Cable / 1500 mm
EX Cable Gland	YES / Explosion Proof Cable Gland
General	
Power Supply	DC24V, AC24V, AC220V
POE Supply	IEEE802.3bt-Max 50 Watt
Web Language	English
Dimension	360*142*249 mm
Package Weight	11 kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +80°C
Certificate Of Case	
Certificate Mark	EX IIC T6 GB / EXT D A21 IP68 T80°C
Certificate Number	CNEx16-2708
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)