


KCI-00SS20V20

Other Products

IP Camera



2021-Q2

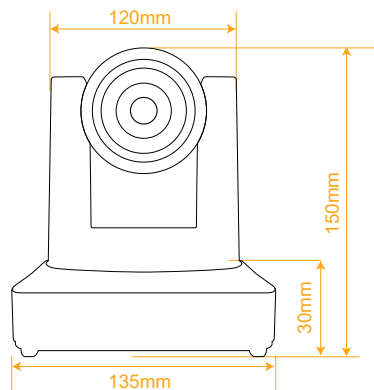

سایر برتری‌ها:

- پشتیبانی از H.265+ / H.264
- پشتیبانی از ONVIF ورژن 2.4
- قابلیت WDR , BLC
- خروجی تصویر HDMI
- پورت RS 485
- کنترل پرتابل

2 years Silver Guarantee

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

Camera	
Image Sensor	2MP Starlight (Sony-Japan) Cmos Sensor (1/2.8")
CPU	Dual-Core ARM Cortex-A7@1400MHz
Lens	5.5-110mm , 20x Optical Zoom and from 3.3 to 54.7°
Resolution	1920*1080 (2MP)
Available IR Range	N/A
D/N Filter	2D & 3D DNR
Min Illumination	0.5 Lux(F1.8, AGC ON)
Angle of View	3.3° (Tele), -54.7° (wide)
StarLight View	Yes-Color
Picture Adjust	
Picture Function	120db WDR, WDR, BLC
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Parameter Control	Brightness, color, Saturation, Contrast, Sharpness, B/W mode, Gamma Curve
D/N Control	Timing, Auto, Color on, Color off
Video / Audio	
Video Compression	H.264, H.265
Audio Compression	AAC/MP3/ G.711A
Frame Rate(30Hz)	30fps@1080P
Transmission Stream	Double Streams outputs simultaneously
Network	
Protocols	HTTP, TCP/IP V4-V6 , RTSP, RTMP, Onvif
Compatibility	Onvif Ver2.4 , Profile S, CGI, SDK, API
Max Users	10 Users
Streaming Method	Unicast
Web Viewer	Internet Explorer
Function	
Recording	FTP, NVR, CMS, NAS, SD Card
Record Type	Manual, Motion Detection, Smart Detection, Schedule

Interface	
Network	RJ45(10/100Mbps)+ LED on Back Panel
Audio	Audio Out, Audio In
video output interface	HDMI, 3G-SDI, LAN, USB3.0, USB2.0
CVBS	N/A
Power	AC110V-AC220V
Control	Yes
Memory Slot	Yes - Micro SD (256Gb Max)
Control Protocol	VISCA/Pelco-P;Baud Rate:115200/9600/4800/2400bps
Control Interface	RS232 (input & output), RS485
General	
Using Area	Indoor
Power Supply	DC In 12V/1.5A z
Web Language	English
Dimension	150*135*135 mm
Weight	1.4 Kg
Operation Humidity	Max Up to 80%RH(Non Condensing)
Operation Temp	-10°C ~ +50°C
PTZ Parameter	
Pan/Tilt Rotation	+170°, -30°~+ 90°
Pan Control Speed	0.1 -60°/sec
Tilt Control Speed	0.1 -30°/sec
Preset Speed	Pan:60°/sec, Tilt: 30°/sec
Preset Number	255 Presets (10 Presets by remote controller)
Guarantee	
Product Guarantee	2 Year Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)