



قابلیت ارایه فرم و امنیتی جهت استفاده در مراکز فوق حساس و نظامی - فاقد قابلیت دسترسی از طریق اینترنت



Smart White light

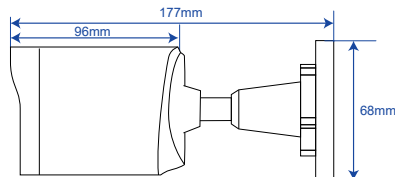

**2 years  
Silver  
Guarantee**

- دو سال گارانتی نقره‌ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

#### سایر برتری‌ها:

- پشتیبانی از میکرو SD با ظرفیت 256Gb
- بدنه ضد آب و گرد و غبار با درجه IP67
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog
- پشتیبانی از ضبط اضطراری ANR

#### قابلیت‌های هوشمند:

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص حرکت سریع
- تشخیص انسان

Camera	
Image Sensor	<b>2MP (Sony-Japan)</b> Progressive scan Cmos Sensor (1/2.8")
CPU	Dual-Core ARM Cortex-A9@ <b>900 MHz</b>
Lens	<b>3.6 mm Fixed Lens</b> @F1.6
Resolution	1920*1080 ( <b>2MP</b> )
Available IR Range	<b>30~40 M Smart</b> IR SMD Technology <b>Smart White light</b> Technology
D/N Filter	IR cut filter with auto switch
Min Illumination	Color: <b>0.01 lux</b> - B/W: 0.0 Lux(IR on)
Angle of View	<b>H-FOV: 94°, V-FOV: 69°, D-FOV: 96°</b>
StarLight View	Yes-Color
Picture Adjust	
Picture Function	<b>120 db WDR/DWDR, 2D/3D DNR, BLC, HLC, ROI, Defog, Rotate</b>
Shutter Speed	Manual (1/3 ~ 1/10.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), <b>H.265+ (Ultra H.265)</b>
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	<b>30fps@ 1080P(1920*1080)</b> , 30fps@ 960P, 30fps@ 720P
Transmission Stream	<b>Triple Stream</b> (Video Bit Rate:11 Kbps~8 Mbps)
Network	
Protocols	TCP/IP(v4, v6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, <b>P2P</b> , Bonjour, SNMP (v1, v2, v3), UDP, NAT, Multicast, RTMP
Compatibility	<b>Onvif Ver2.6</b> , Profile S, CGI, SDK, API
Streaming Method	Unicast, Multicast
Web Viewer	Internet Explorer
Smart Device	IOS, Android Phone & Tablet

Function	
Recording	FTP, NVR, CMS, SD Card, <b>ANR</b>
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message, Smart Light
Event	Motion Detection, Video Shelter
Intelligent Function	<b>6 Smart Function</b> Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving, Human Detection
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	Audio In, Audio Out
Alarm	N/A
CVBS	N/A
Power	<b>PoE</b> LAN, DC In
Control	N/A
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot ( <b>256 Gb Max</b> ) ( <b>ANR Support</b> )
General	
IP Rating	<b>IP67, 2KV Surge Protection</b>
Power Supply	DC12V ± 10%
POE Supply	<b>IEEE802.3af - Max 6 Watt</b>
Web Language	English, <b>Persian</b>
Dimension	177*68*96 mm
Weight	415 g
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-30°C ~ +60°C
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min- MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR